

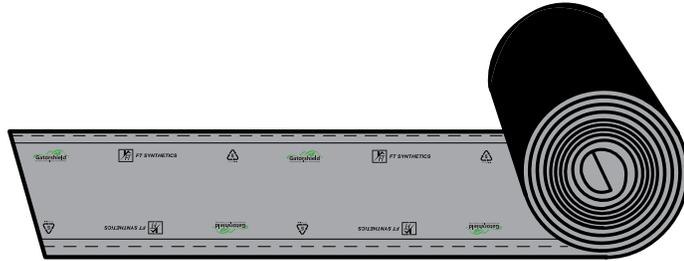


INSTALLATION INSTRUCTIONS

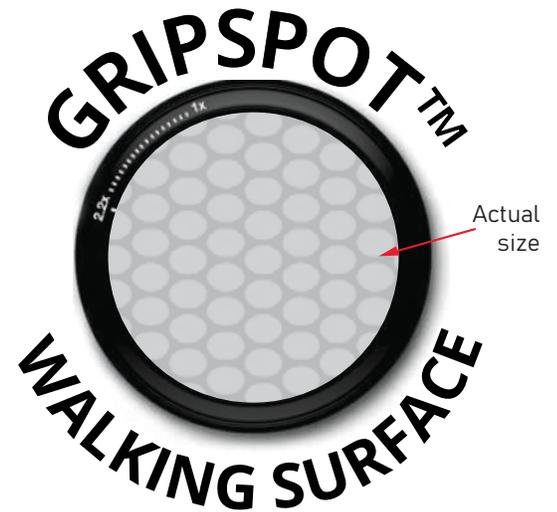

STEP 1

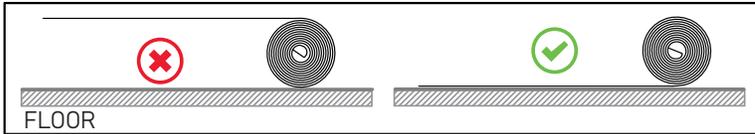


**Note: Printing ink from top surface may transfer to flooring or carpet if material is used upside down.

Black side down

Roll out product with grey printed side facing up, and black chemically treated slip resistant surface facing down. The top GripSpot® embossed raised fiber surface provides liquid absorption as well as an enhanced slip resistant walking surface.

STEP 2



Cut Gatorshield with utility knife or scissors

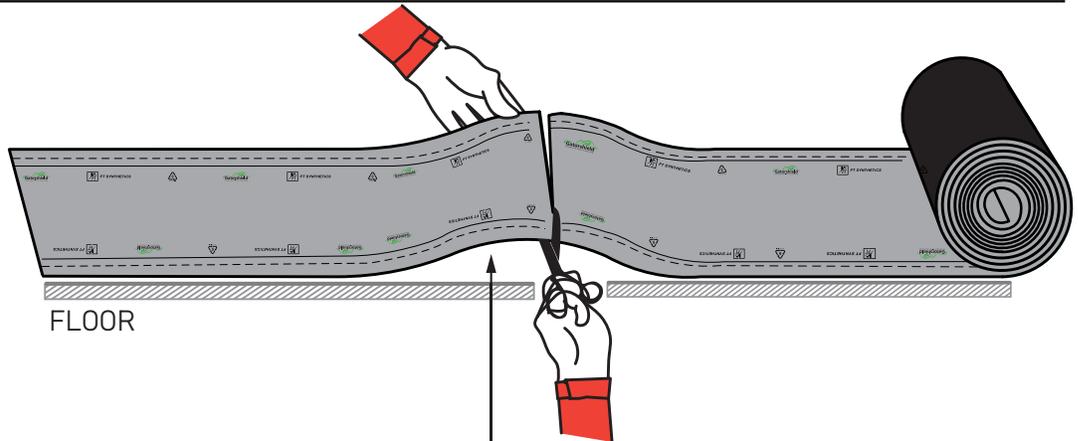

LIFT GATORSHIELD UP AWAY FROM FLOOR TO CUT

STEP 3

SECURE TO FLOOR WITH NON MARKING TAPE [PAINTER'S TAPE]

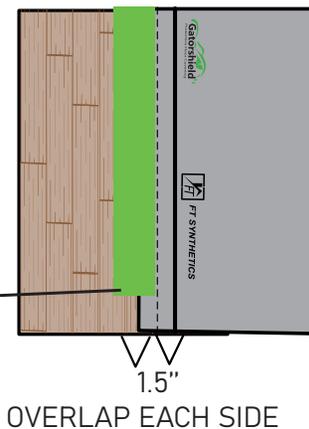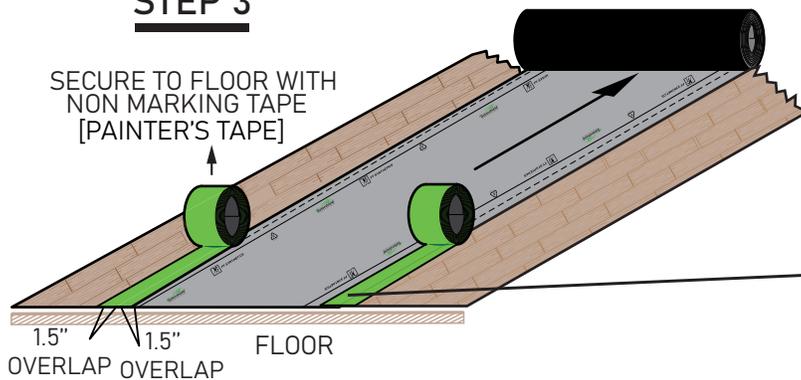

Tape Gatorshield to the floor on both sides using a 3" wide non-marking tape. Overlap the tape 1.5" onto the Gatorshield using the dotted line printed on the product. This will allow for 1.5" of tape to be applied to the flooring surface.



FT SYNTHETICS


www.ftsyn.com

844-353-9839




INSTALLATION INSTRUCTIONS

STEP 4

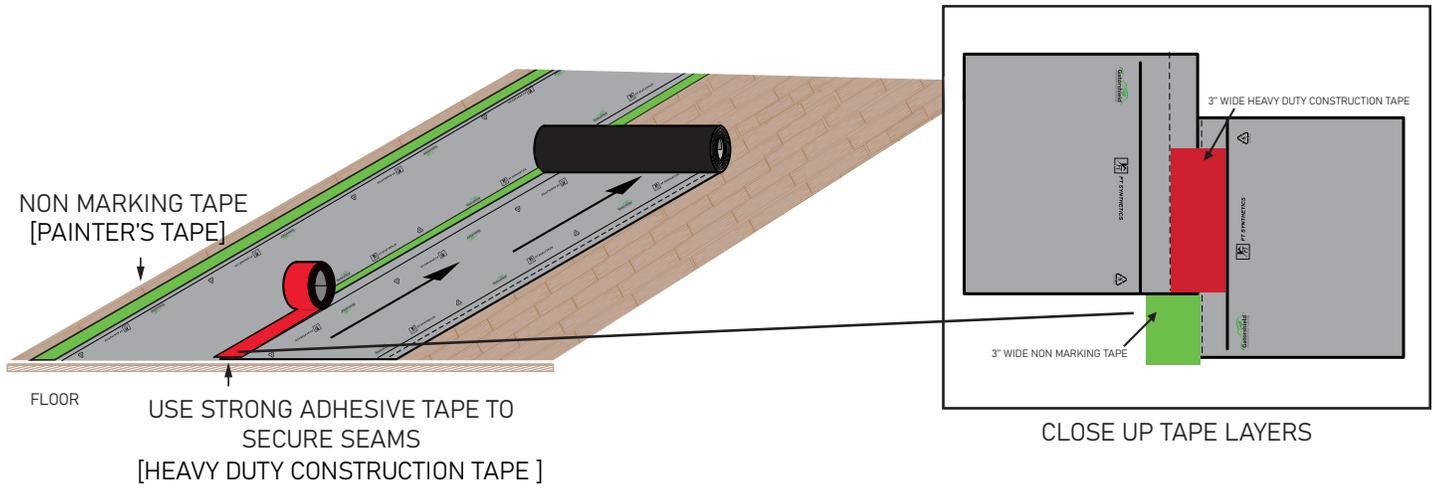

If covering a wider floor space, where more than one row of material is required, seams can be taped with a stronger construction or vapor barrier tape. This is due to the fact that the tape adhesive will not be in contact with the floor. Start by overlapping the edges of the Gatorshield 1.5" over the tape used to secure the first row of product to the floor. Tape the overlap again with 3" construction tape using the solid line located 3" in from the edge of the Gatorshield to align the outer edge of the tape.

STEP 5

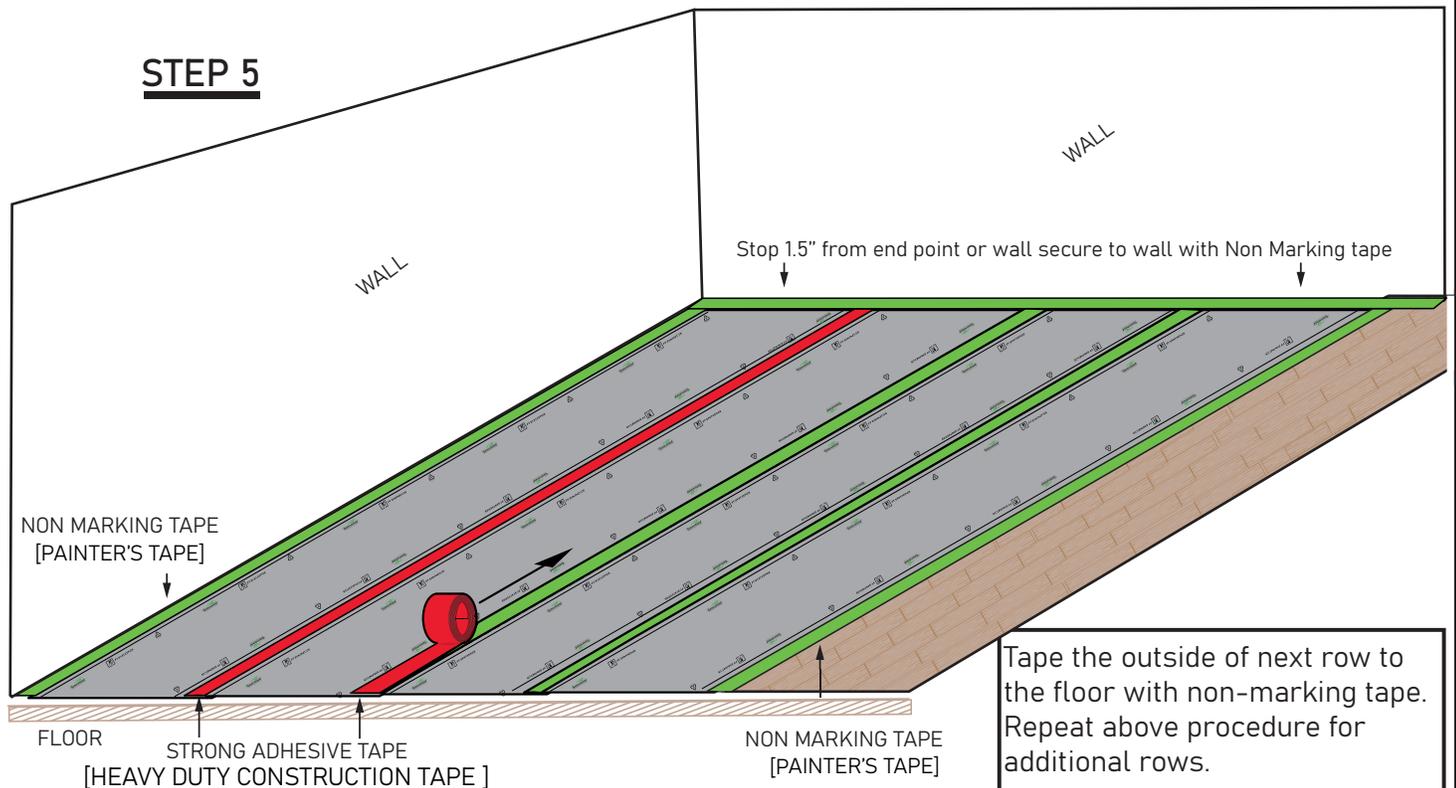

Tape the outside of next row to the floor with non-marking tape. Repeat above procedure for additional rows.

