



COPPERHEAD[®]

Deck Joist & Beam Tape



Embossed Slip Resistant Walking Surface



X4
Magnification

COPPERHEAD - Deck Joist & Beam Tape is a flexible waterproof self adhered Butyl tape used to maximize the life expectancy of wooden deck structures. It is designed to help stop decay and wood rot caused by moisture that runs off the deck boards and stays in contact with the wooden deck framing. It functions as a moisture barrier cap directly on top of joists and beams. The advanced butyl rubber adhesive combined with a UV resistant Polyethylene facer acts as a barrier diverting water and sealing around fasteners. This prevents premature wood rot while still allowing the joists to breathe, ensuring your foundation lasts as long as the deck. Copperhead JBT tape is compatible with the majority of deck materials including pressure treated wood and composite products.

JOIST AND BEAM TAPE

Made in Canada

- Durable, high strength, flexible and UV resistant engineered film facer.
- High temperature butyl adhesive, thermal stable to **260°F(132°C)**, no drips, oozing or stains.
- Ridged Black Polyethylene top surface is slip resistant and won't show between deck boards.
- Cold temperature install down to **25°F(-4°C) and rising.**
- Pressure sensitive Butyl adhesive forms a tight seal around deck fasteners.
- Easy to remove silicone treated release liner.
- Stock available in 2 sizes; 1 5/8" for joists and 3 1/4" for beams.


COPPERHEAD[®]

Deck Joist & Beam Tape

Copperhead – Deck Joist & Beam Tape

| Specification & Standard | Typical Values |
|--|--|
| Length per roll | 75ft (22.8m) |
| Rolls widths available: 1 5/8", 3 1/4" | 1 5/8" - up to 28 rolls/box 3 1/4" - up to 12 rolls/box |
| Weight per square meter | 626 GSM |
| Master box weight | 31.26 Lbs |
| Master box gross coverage per box | 243.75 sq.ft |
| Slip resistant top surface- Embossed ridged top surface | Embossed Traction Grip |
| Release liner | Silicone treated release liner |
| Fastener sealability - AAMAS 711 | Pass |
| Permeability - ASTM E96 | <0.05 Perms |
| Minimum thickness - ASTM D1970 | 25 mils |
| Elongation MD / CD - ASTM D1970 | >300% |
| Low temperature flexibility - ASTM D1970 | Pass |
| Adhesion to plywood @75°F(23°C) 40°F(4.4°C) - ASTM D1970 | 75 lbf/ft 65 lbf/ft |
| Adhesion to metal @75°F(23°C) 40°F(4.4°C) - ASTM D1970 | 85 lbf/ft 80 lbf/ft |
| Thermal stability - ASTM D1970 | 260° F (126°C) |
| Installation temperature | >25°F (-4°C) |
| Service temperature | -40°F to 270°F |
| Limited warranty | 10 Years |

The data shown above is based on the test averages and independent test reports. There can be a +/-10% variation in the individual test results. This report should not be considered as a warranty for the manufacturer. The manufacturer is not responsible for the misrepresentation or misinterpretation of the data by the reader. Please find out more about the product by calling 1-844-353-9839 or visit www.ftsyn.com. The Copperhead logo is a registered trademark of FT Synthetics.

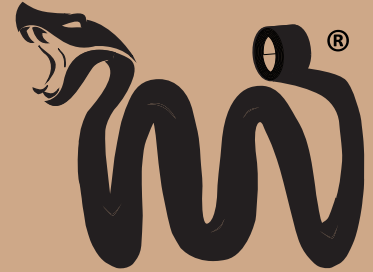

Product Warranty:

FT Synthetics Inc. warrants its materials to be free of manufacturing defects for a period of ten(10) years from date of purchase when product is applied in accordance with manufacturers published directions. For current installation instructions visit. www.ftsyn.com